

Testing Date	14-Dec-17
Ambient Temperature	18 ± 2°C
Document No.	KST-TS10S5P-29E-01

**Li-ion 36V 14.5Ah eBike Battery**




Battery Pack Specifications	
Cell Model	Samsung INR18650-29E
Configuration	5P10S
Nominal Capacity	14.5Ah
Minimum Capacity	13.75Ah
Nominal Voltage	36V
Nominal Energy Content	522Wh
Charge Voltage	42V
Standard Charge Current	3A
Max. Charge Current	5A
Max. Continuous Discharge Current	20A
Peak Discharge Current	40A
Discharge Cut-off Voltage	25V
Gross Weight (Approx.)	3.70KG
Dimensions	380×78×132mm
Charge Connector	Female DC5521
Discharge Connector	30A Anderson
Operating Temperature	Charge: 0°C to 45°C Discharge: -20°C to 60°C

BMS Specifications	
Number Of Cluster	10S
Charge And Discharge Port	Different
Max. Allowed Charge Current	5A
Max. Continuous Discharge Current	20A
Overcharge Protection Voltage	42.5 ± 0.25V
Overdischarge Protection Voltage	25.0 ± 0.62V
Overload Protection Current	55 ± 10A
Overheat Protection Temperature	65°C
External Shortcircuit Protection	Available

Test	Conditions	Test Result
8A Discharge To	26.2V	14.156Ah

**Typical discharge profiles (8A - 0.55C rate)**

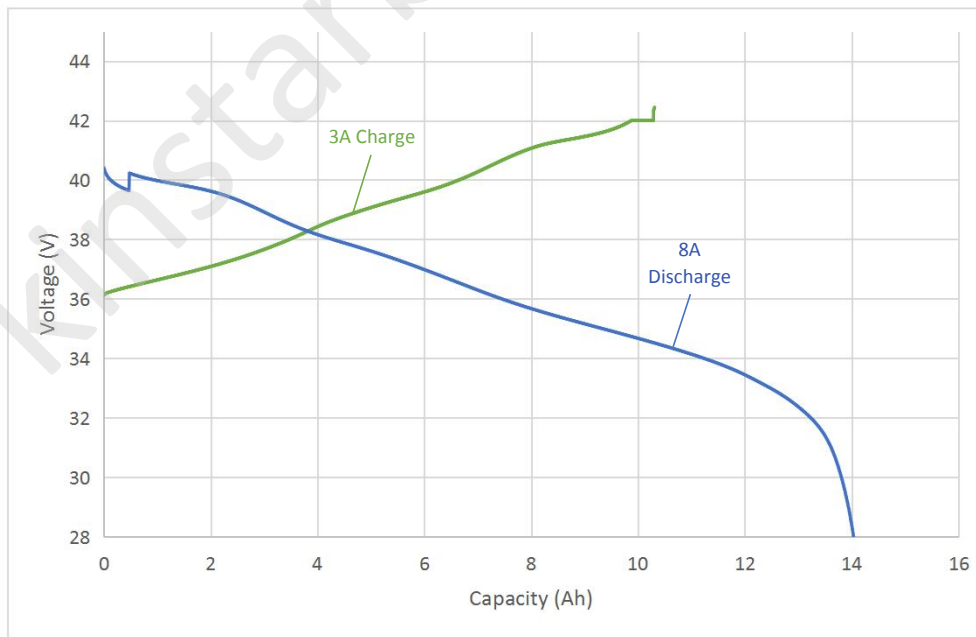

Preliminary specifications, performance may vary depending on use conditions and application. KinStar makes no warranty explicit or implied with this test report. Contents subject to change without notice.